


1. COVER TO REINFORCING STEEL SHALL BE 40 mm MIN, EXCEPT WHERE NOTED OTHERWISE.
2. EXPOSED CONCRETE CORNERS SHALL BE CHAMFERED 20 mm
3. PLACE AN ADEQUATE AMOUNT OF SILICONE ADHESIVE ON BOTTOM OF WASHER BEFORE INSERTING PIN TO HOLD IN PLACE AND PREVENT EASY HAND REMOVAL. FILL NUT WITH GREASE TO EXCLUDE ICE OR OTHER CONTAMINANTS.
4. 3 mm TAPER ON ALL NOTCHES TO FACILITATE FORM REMOVAL.
5. PRECAST HALF BARRIER SHALL BE PLACED WHERE THERE IS A SUPPORT STRUCTURE BEHIND EACH SECTION (E.G. SOUND WALL, MSE WALL etc.)
6. PRECAST HALF BARRIER SHALL NOT BE USED AS AN ALTERNATE, IN CONJUNCTION WITH PRECAST CONCRETE FULL BARRIER SECTIONS, IN A WORK ZONE
7. REFER TO AASHTO ROADSIDE DESIGN GUIDE FOR SHY DISTANCE REQUIREMENTS. SHOULDER WIDTH PLUS 600 mm MUST EQUAL OR EXCEED SHY DISTANCE.

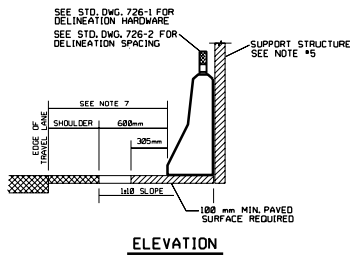

ALL DIMENSIONS ARE SHOWN IN MILLIMETERS (mm) UNLESS OTHERWISE NOTED.

[illegible]